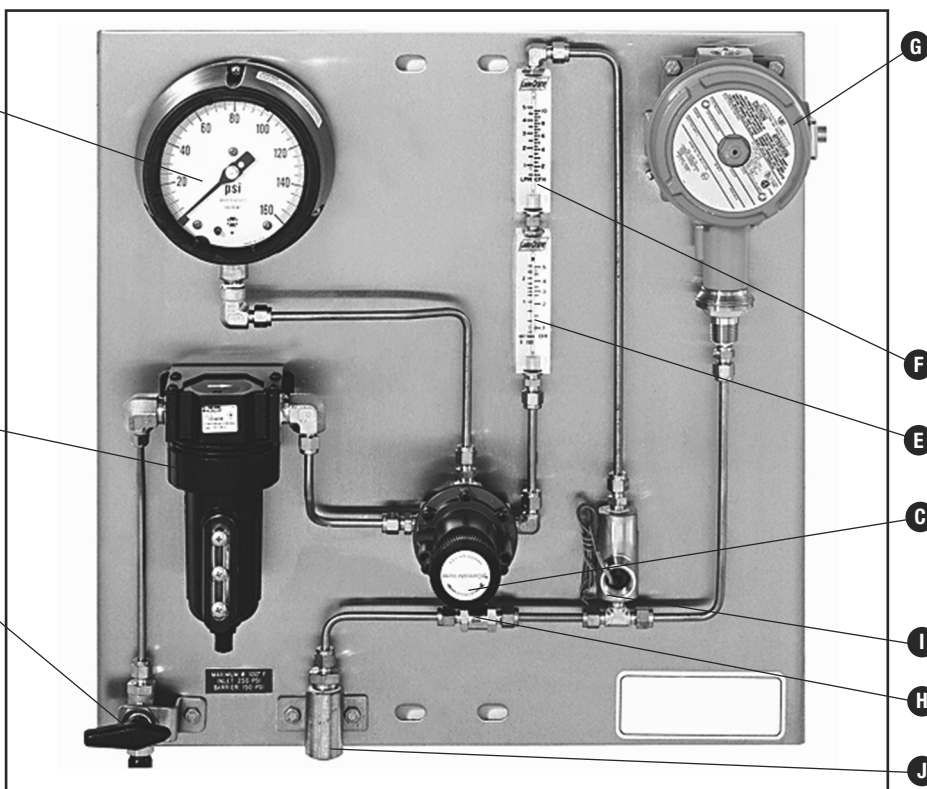


- A** – Ball Valve (Inlet)
- B** – Coalescing Filter
- C** – Pressure Regulator
- D** – Pressure Gauge
- E** – Flow Meter Normal Flow
- F** – Flow Meter High Flow
- G** – Pressure Switch
- H** – Check Valve
- I** – Flow Switch
- J** – Connection to Seal

**Non Stocked Options**

Support Stand (not shown)

Enclosure (not shown)

**Design Features/Benefits**

Purpose designed (non API) low cost panel to regulate and monitor seal gas supply to gas lubricated pump seals

- Inlet max pressure: 17.2 bar g (250 psig) at 38°C (100°F)  
Barrier max pressure: 10.3 bar g (150 psig) at 38°C (100°F)
- Minimum design temperature: -10°C (14°F)
- Coalescing filter: ensures clean, dry gas to seals
- Adjustable regulator: accurate setting of gas pressure supplied to seals/gas loss is minimized
- Visual flow indicators: monitors gas consumption
- Check valve: prevents process contamination of panel components and tubing

**Option Variants**


- Pressure gauge ranges
- Pressure switch ranges
- Dual outlet for double ended seal configuration
- Pressure switch suitable for:
  - Exei circuits or Eexd (ATEX)
  - Explosion Proof (UL/CSA)
- Flow switch suitable for:
  - Exei circuits or Eexm (ATEX)
  - Explosion Proof (UL/CSA)
- Fibreglass or 304 Stainless Steel enclosure

**Applications**


- Chemical processing
- Gas processing
- Paint and coatings
- Pharmaceutical
- Pulp and paper
- Rubber and plastics

**Materials of Construction**

- Panel: 304 stainless steel
- Flow indicators: acrylic
- Coalescing filter: aluminium housing
- Regulator: aluminium housing
- Tube and fittings: 316/L stainless steel



Single outlet



Dual outlets for pumps with 2 seal chambers (e.g. between bearing configuration)

### Option Codes

PRESSURE RANGE			
Design/Working Pressure	PG Range	PS Range	Code
0-7 bar g/0-100 psig	0-10 bar g/0-150 psig	0-10 bar g/0-150 psig	A
7-10 bar g/100-225 psig	0-20 bar g/0-300 psig	7-17 bar g/100-250 psig	B

GAS PANEL CONFIGURATION		Code
Single outlet for pump with 1 seal chamber		S
Dual outlets for pump with 2 seal chambers		D

ELECTRICAL ENVIRONMENT TYPE		ELECTRICAL CERTIFICATION	
Electrical Protections	Code		Code
Explosion Proof – Pressure switches Eexd (ATEX) – XP (UL/CSA), Flow switches Eexm (ATEX) – XP (UL/CSA)	F	UL/CSA	U
Eexi – for intrinsically safe circuits (for ATEX only)	I	ATEX (EU countries)	A
Not applicable – no electrical equipment on system	N	ATEX (non-EU countries)	S

EQUIPMENT OPTIONS	
Pressure Regulator	Included
Filter Assembly	Included
Flow Meter	Included
Pressure Gauge – range follows pressure range selection	Included
Ball Valve – isolation from nitrogen inlet (for dual outlets, two additional valves are mounted on the outlet lines)	**1
Check Valve – protection against back pressure	**2
Pressure Switch	**4
Flow Switch	**8
Fiberglass enclosure (non stocked option)	*16
304 stainless steel enclosure (non stocked option)	*32
Support Stand (non stocked option)	*64

To specify equipment options add together each component code for the items to give a total figure. the total preceded by any spare spaces making up the 3 digits, should be inserted in the options section of the order code e.g. /42.

(UL/CSA)/ATEX Certification

Electrical Protection

Pressure Range

Single or dual outlets


Order code GP/ \* \* \* \* /\*\*\*

### NOTES


- 1 Electrical connection is M20 (ATEX) or, 3/4" NPT (UL/CSA)
- 2 The flow switch option is provided with no junction box

### GP-S Typical Arrangement

NOTE: Instrument mounting is indicative only and may vary depending on the options selected

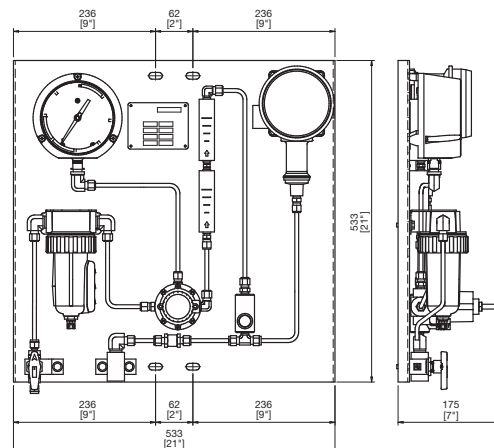

### GP-D Typical Arrangement

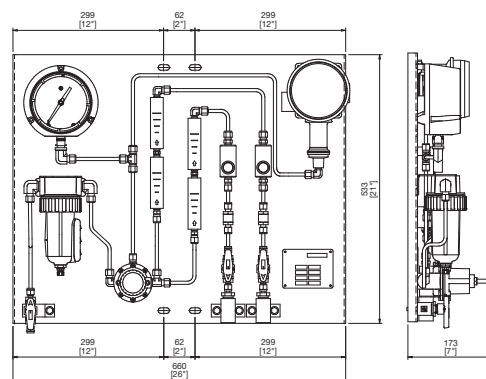

92, Lot Mauritania - Zone Industrielle Bernoussi  
Casablanca MAROC 20590



www.marocsealing.com



marocsealing@marocsealing.com



(+212) 05 22 35 41 49/50



(+212) 05 22 35 41 52



+212 6 62 14 80 39



**Maroc Sealing**  
FLUID CONTROL