



Stainless Steel Airmotors up to 1 1/2 hp, speeds from 500 to 3,000 rpm



MODEL

4AM-NRV-200SS FACE MOUNT

(4 Vanes, Reversible) 11.5 lbs. (5.2 kg)

4AM-NRV-201SS NEMA 56C

(4 Vanes, Reversible) 16.6 lbs. (7.5 kg)

FEATURES




- Sanitary Design
- 304 stainless steel housing, rotor & output shaft
- Face or flange mounting
- Any plane operation
- Fully sealed

• **Π 2 GD c T4**


RECOMMENDED

- Regulator AH101R
- Gauge AA807
- Lubricator AH102L
- Food Grade Oil AS117


inches / mm

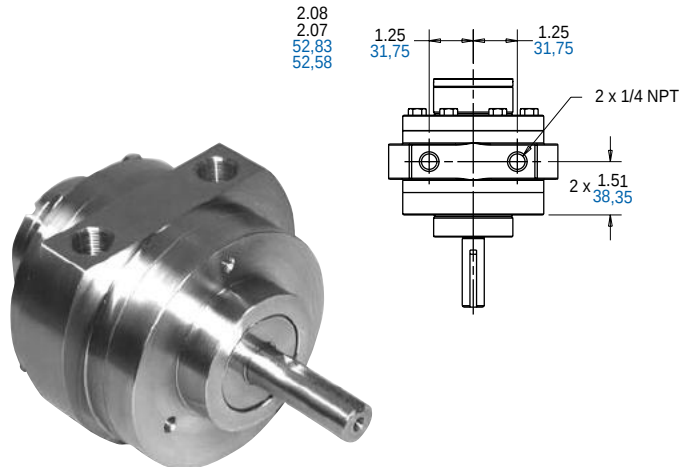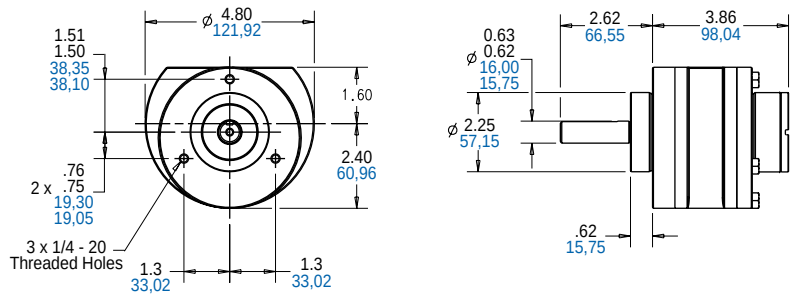


Output Power vs. Speed

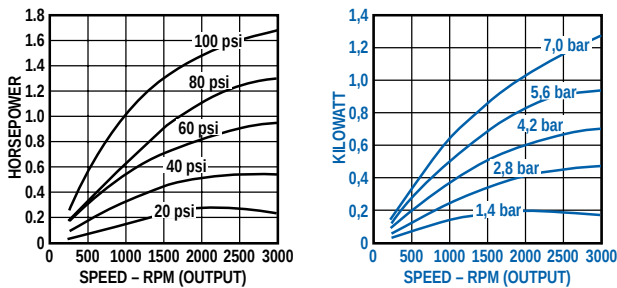



Torque vs. Speed

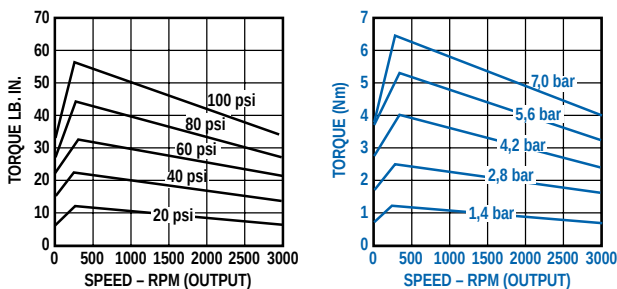


Air Consumption vs. Speed

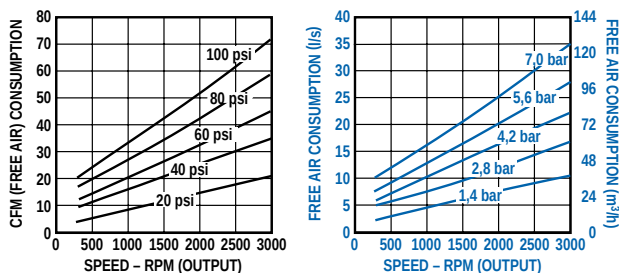

inches / mm

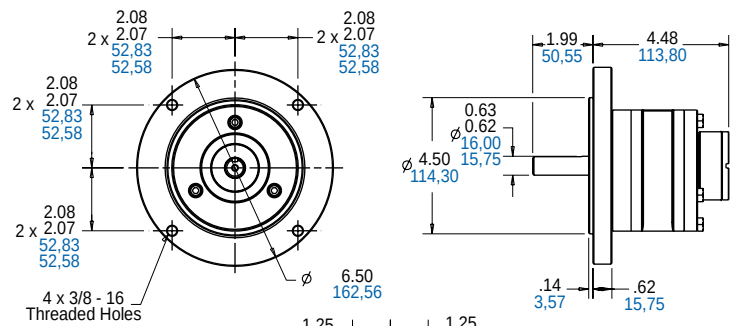

EXPLODED PRODUCT VIEW, PARTS & ORDERING INFORMATION 4AM SERIES

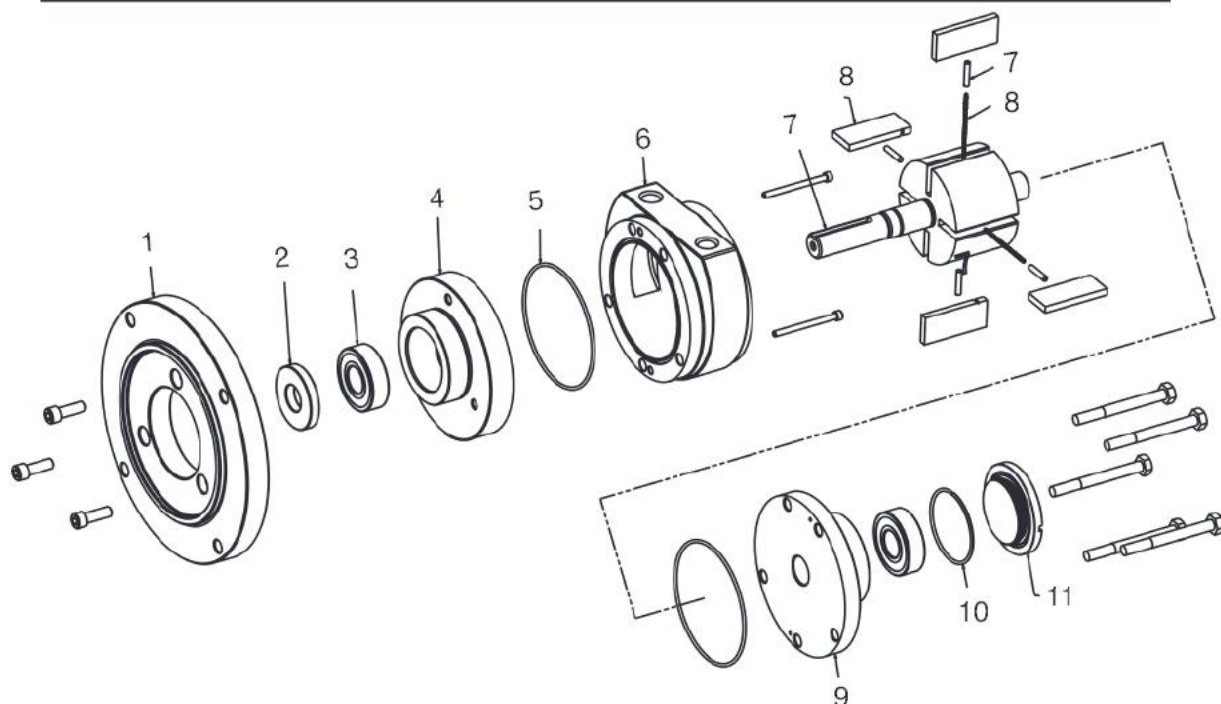

4AM SERIES

REF#	DESCRIPTION	QTY	HUB MOUNT 4AM-NRV-200SS	FLANGE MOUNT 4AM-NRV-201SS
1	FLANGE	1		AS128
2 Δ	SEAL	1	AS132	AS132
3	BEARING	2	AS131	AS131
4	DRIVE END PLATE	1	AS121	AS121
5 Δ	O-RING, BODY	2	AS130	AS130
6	BODY	1	AS120	AS120
7	ROTOR ASSEMBLY	2	AS124	AS124
8Δ	VANE	4	AB876	AB876
9	DEAD END PLATE	1	AS122	AS122
10Δ	O RING END CAP	1	VG2145	VG2145
11	END CAP	1	AS123	AS123
12	PUSH PIN	4	AM467	AM467
13	SPRING	2	AM466	AM466
*** Δ	SERVICE KIT	1	K205SS	K205SS
*** Items not shown Δ Denotes parts in the service kit				

To avoid injury, exhaust air should be plumbed away or appropriate muffler should be used