


# Si 4 Series



Engineering  
GREATSolutions

High Flow Safety Valve

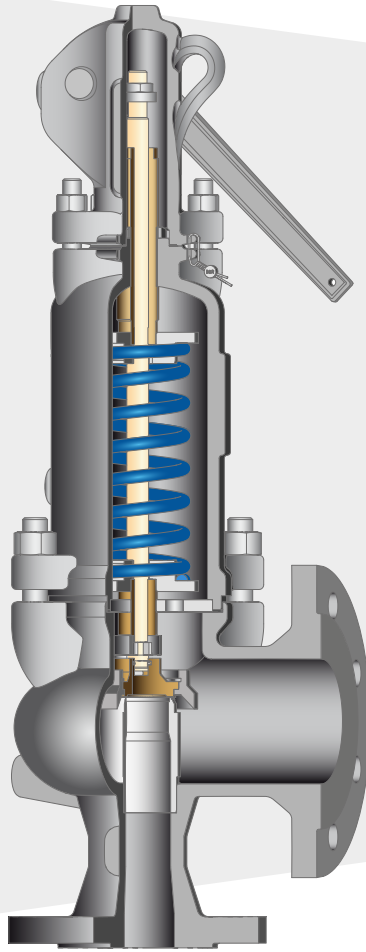

# Si 4 Series

State-of-the-art high capacity process safety valve for medium pressure with cost-effective semi-nozzle body design and seat bushing.

## Key features

- > Streamlined design
- > Reduced weight
- > Simplified internals
- > Extended bonnet
- > Lifting lugs
- > Dedicated area for tag plates
- > Seat bushing is press fitted
- > Modular design
- > Optimised for lean assembly
- > DN 20 to 200
- > 0.1 bar g up to 40 bar g
- > Materials 1.0619 & 1.4408

Excellent function and performance maintained

Engineered for high discharge

Single trim for steam, gases and liquids

Reliability by design

## Benefits

Developed as a modular design alongside other models, the new Si 4302-E1 provides reliable function with great capacity.

The inner parts are made of stainless steel.

On the extended bonnet, once the set screw is loosened there is no pre-loading force on the spring. The bonnet-flange bolts can now be removed easily.

Easy maintenance when dismantling the valve for lapping of the seat and disc possible without change of set-pressure.


The bellows are in a safe location outside the flowpath to ensure extended lifetime.

For vapours, gases and liquids: typical applications are pressure vessels, heat exchangers and piping systems, such as those found in the chemical and

petrochemical industries, as well as in power plant technology, steam generation, potable water pipelines and cryogenic gas rectification.

The new Si 4302-E1 flow capacity is identical to the previous Si 43 and exceeds the Si 6302 capacity. Center-to-face dimensions of entire valve generation are unchanged. Height and weight may vary slightly.

1. One body gasket only
2. New spindle disc, lift collar design, upgraded for easy and safe assembly
3. Easy assembly with circlip pliers
4. Body bonnet redesigned for quality improvements and lighter appearance
5. Body to seat bush interference fit

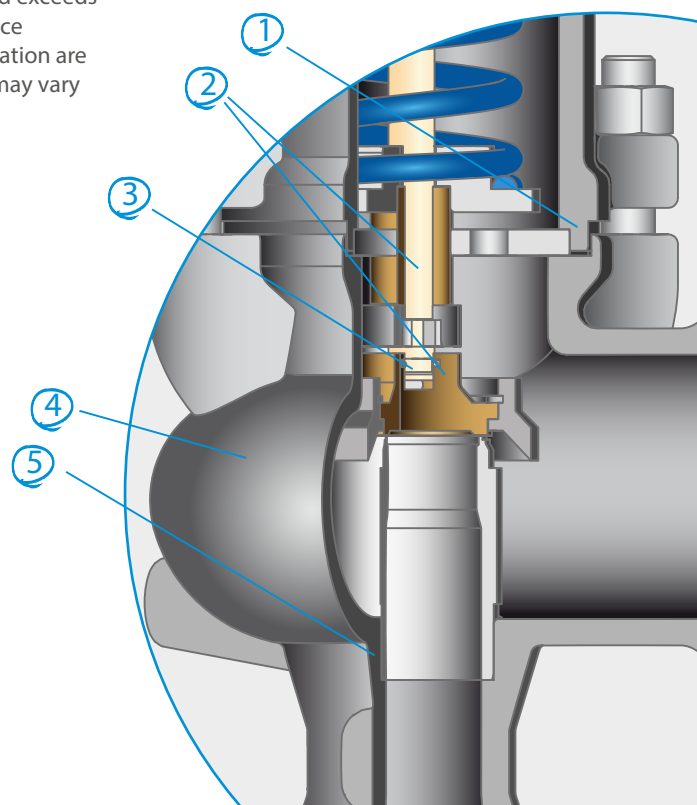


## Product specifications

Sizes  
DN 20 to DN 200

Set pressures  
0.1 bar g up to 40 bar g

Materials  
1.0619  
1.4408

## Product breakdown

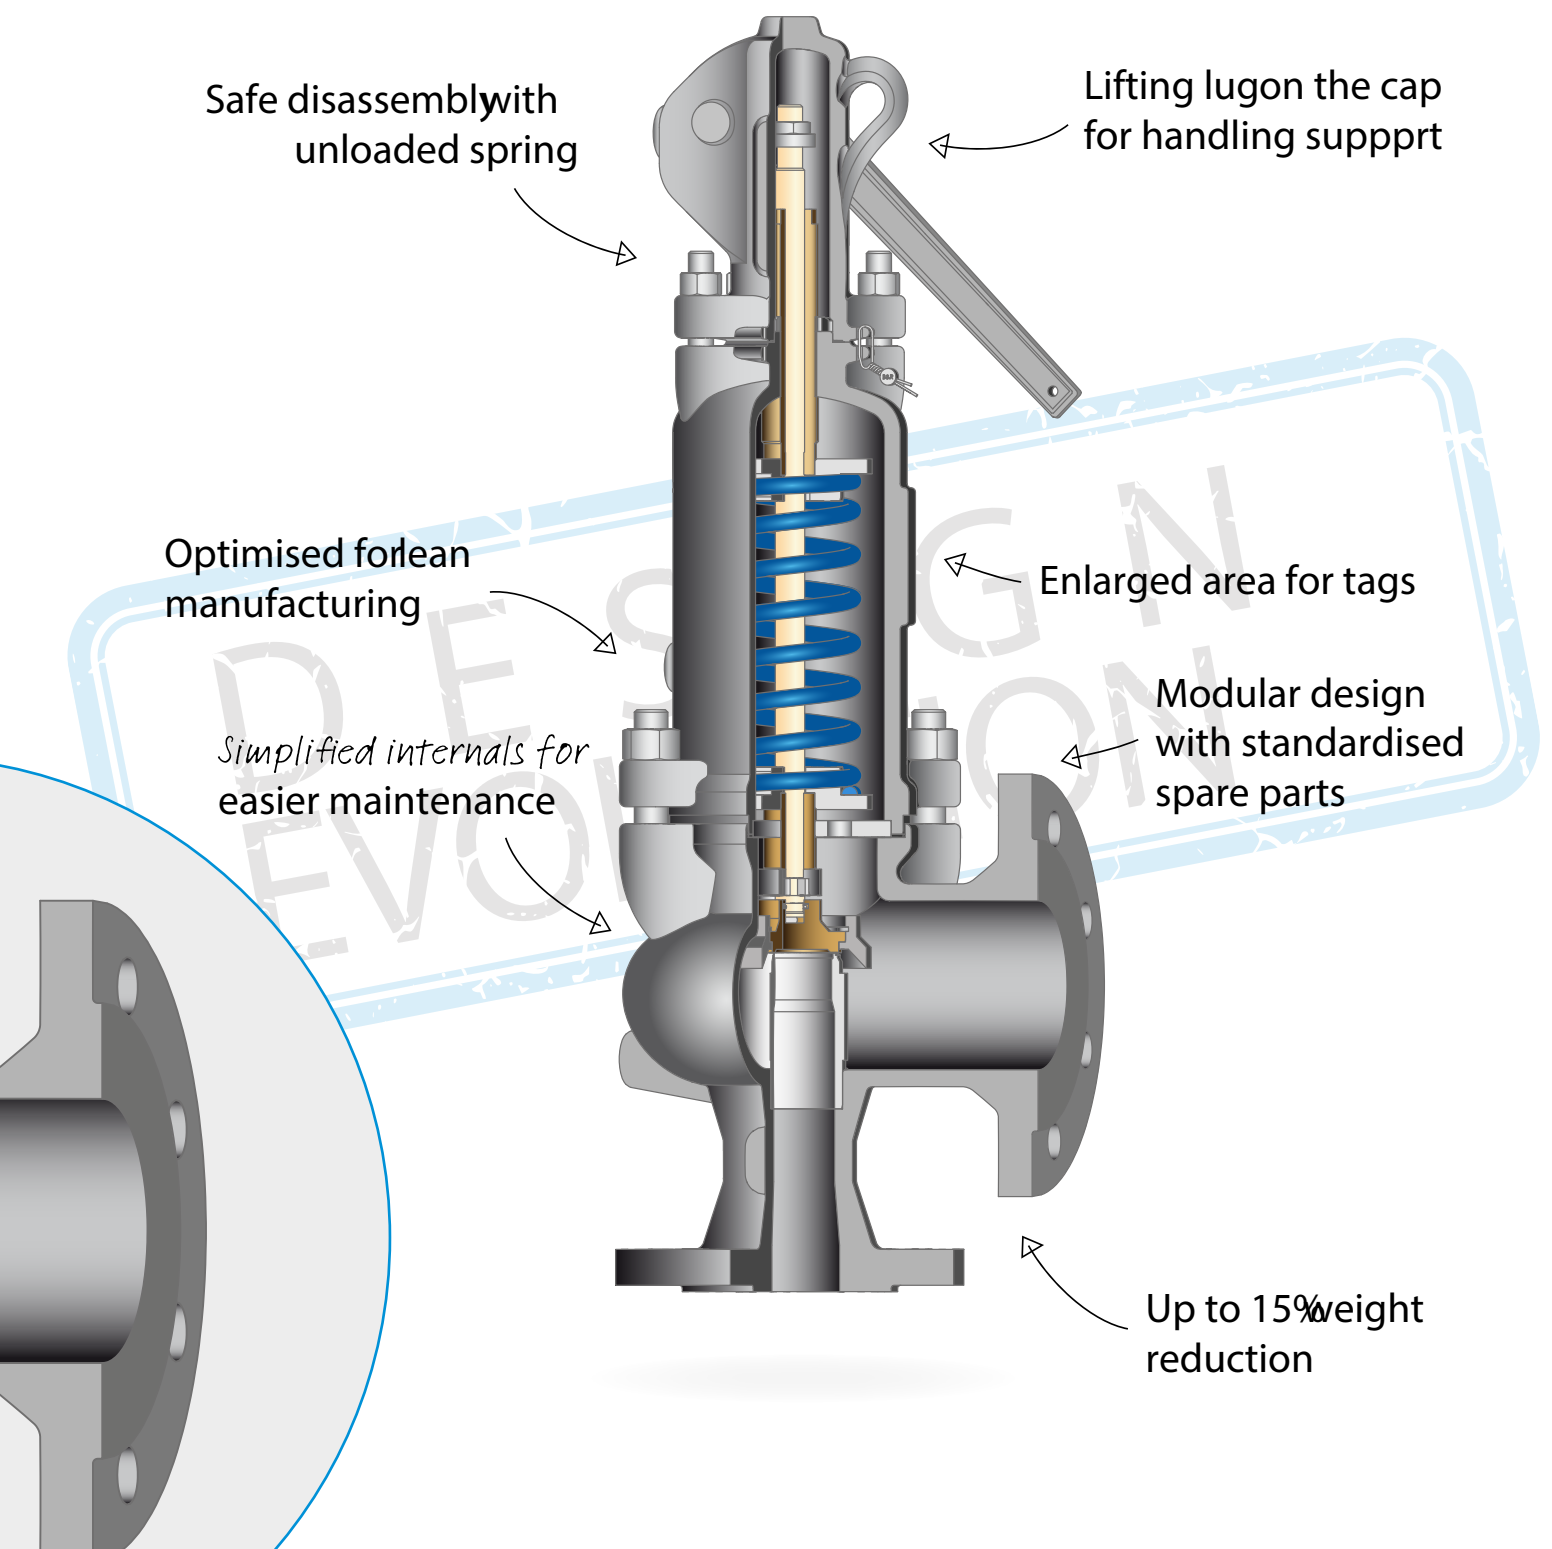



**Maroc Sealing**  
FLUID CONTROL



92, Lot Mauritanie - Zone Industrielle Bernoussi  
Casablanca MAROC 20590



[www.marocsealing.com](http://www.marocsealing.com)



(+212) 05 22 35 41 49/50



[marocsealing@marocsealing.com](mailto:marocsealing@marocsealing.com)



(+212) 05 22 35 41 52



(+212) 06 62 14 80 39